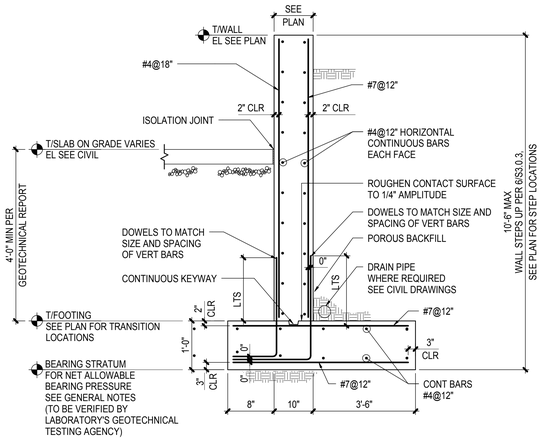

NOTES:

1. WALL DESIGNED FOR DRAINED CONDITION. SEE MECHANICAL AND/OR CIVIL DRAWINGS
2. DO NOT BACK FILL UNTIL WALL COMPRESSIVE STRENGTH f'c REACHES 28 DAY DESIGN STRENGTH
3. FOR RETAINING WALL EXPOSED TO VIEW PROVIDE VERTICAL CONTRACTION JOINTS AT 20'-0" ON CENTER MAXIMUM (8'-0" MAXIMUM FROM CORNERS). COORDINATE WITH ARCHITECTURAL DRAWINGS

1 TYPICAL RETAINING WALL SECTION (NORTH WALL OF LOADING DOCK)

NOT TO SCALE

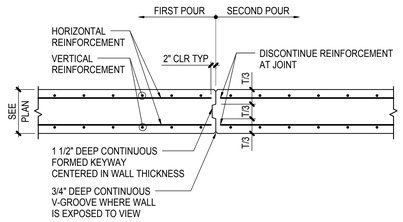

NOTE:

1. SEE GENERAL NOTES FOR CONSTRUCTION JOINT MAXIMUM SPACING

2 TYPICAL VERTICAL CONSTRUCTION JOINT - PLAN AT RETAINING WALL

NOT TO SCALE

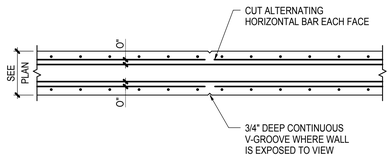

3 TYPICAL VERTICAL CONTRACTION JOINT - PLAN AT RETAINING WALL

NOT TO SCALE

SMITHGROUP
architecture engineering interiors planning

SMITHGROUP, INC
35 EAST WACKER
SUITE 2200
CHICAGO, IL 60601
T 312.641.0770
F 312.641.6728
www.smithgroup.com

JJR
landscape architecture planning urban design civil engineering environmental science

JJR, LLC
35 EAST WACKER DRIVE
SUITE 2200
CHICAGO, ILLINOIS 60601
312.641.0510 T
312.641.0668 F
www.jjr-us.com

AEI Affiliated Engineers
Affiliated Engineers, Inc.
5802 Research Park Boulevard
Madison, Wisconsin 53719
Tel 608.238.2616 Fax 608.238.2614

Thornton Tomasetti
Thornton Tomasetti, Inc.
330 N. Wabash Avenue, Suite 1500
Chicago IL 60611-7622
T 312.596.2000 F 312.596.2001

TERRA ENGINEERING LTD.
225 West Ohio Street, 4th Floor
Chicago, Illinois 60654
T:(312)467-0123 F:(312) 467-0220

SEALS AND SIGNATURES

PROJECT NORTH

REV. NO.	DESCRIPTION	BY	APVD	DATE
	ISSUED FOR CONSTRUCTION			07/03/12

Argonne NATIONAL LABORATORY

FMS
Facilities Management Services

PROJECT TITLE: ADVANCED PROTEIN CRYSTALLIZATION FACILITY, ARGONNE NATIONAL LABORATORY

PROJECT NO: C10539.00

DRAWING TITLE

TYPICAL RETAINING WALL DETAILS

DESIGNED Designer	A/E CADD FILE S3.0.6	FACILITY NO(S)
DRAWN Author	A/E DWG. NO. S3.0.6	
CHECKED Checker	CAD NO:	
PROJECT MANAGER ANL - JESSE ADAMS DATE - 08/31/11	DWG STATE	
	BIND ORDER	
FACILITY DOCUMENT NUMBER J446-101-W-	S3.0.6	REV. NO.

Plot Date: 6/27/2012 5:18:19 PM